


CARD # 11940

AMP POWER LOCK BOARD MOUNTED CONNECTOR - 5 REQD.

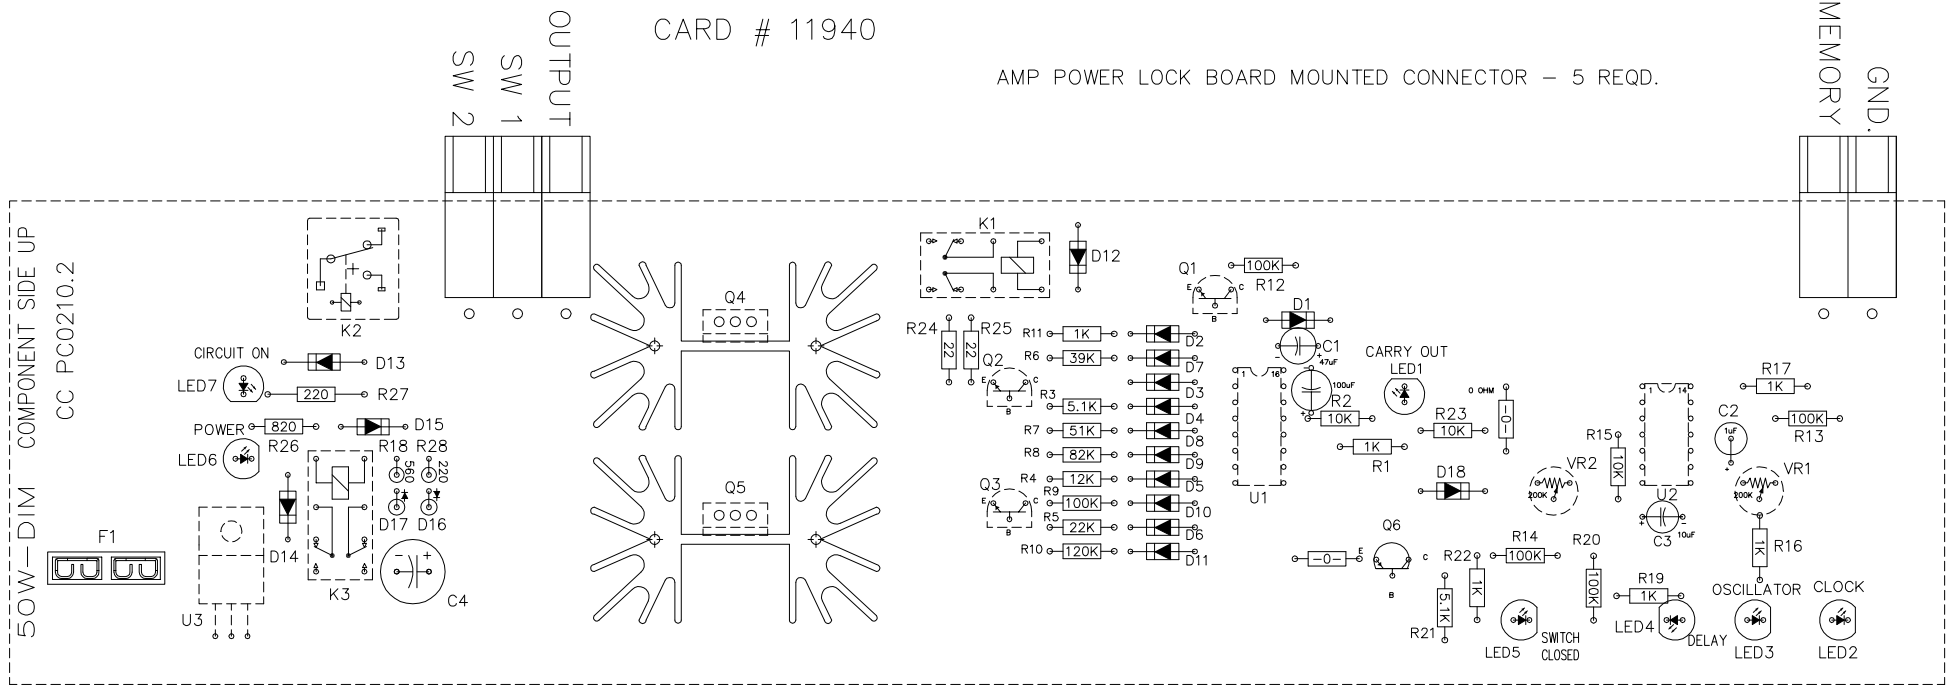

- | | | | |
|--------------|----------------------|----------------------|--------------|
| C1 = 47uF | D16 = 1N4006 | LED5 = T 1 3/4 RED | R16 = 1K |
| C2 = 1uF | D17 = 1N4006 | LED6 = T 1 3/4 GREEN | R17 = 1K |
| C3 = 10uF | D18 = 1N914 | LED7 = T 1 3/4 RED | R18 = 560 |
| C4 = 470uF | VR1 = 200K OHM POT | R1 = 1K | R19 = 1K |
| C5 = 100uF | VR2 = 200K OHM POT | R2 = 10K | R20 = 100K |
| D1 = 1N4006 | Q1 = 2N-2222 | R3 = 5.1K | R21 = 5K |
| D2 = 1N914 | Q2 = 2N-2222 | R4 = 12K | R22 = 1K |
| D3 = 1N914 | Q3 = 2N-2222 | R5 = 22K | R23 = 10K |
| D4 = 1N914 | Q4 = 2N-6488 | R6 = 39K | R24 = 22 |
| D5 = 1N914 | Q5 = 2N-6488 | R7 = 51K | R25 = 22 |
| D6 = 1N914 | Q6 = 2N-2907 | R8 = 81K | R26 = 820 |
| D7 = 1N914 | F1 = 7.5 AMP. | R9 = 100K | R27 = 220 |
| D8 = 1N914 | K1 = MR62-12USR | R10 = 120K | R28 = 220 |
| D9 = 1N914 | K2 = EP1F-B3G1S | R11 = 1K | U1 = IC 4017 |
| D10 = 1N914 | K3 = MR62-12USR | R12 = 100K | U2 = IC 324 |
| D11 = 1N914 | LED1 = T 1 3/4 RED | R13 = 100K | U3 = LM7812 |
| D12 = 1N4006 | LED2 = T 1 3/4 GREEN | R14 = 100K | |
| D13 = 1N4006 | LED3 = T 1 3/4 RED | R15 = 10K | |
| D14 = 1N4006 | LED4 = T 1 3/4 RED | | |
| D15 = 1N4006 | | | |

471	772			
8-25-92	6-17-97			
473				
10-15-92				
739				
4-25-97				
753				
11-7-97				

Country Coach, Inc.
135 East First Street PO Box 400 Junction City, OR 97448

MODEL: BC-ALL	50 WATT ELECTRONIC DIMMER CARD	PAGE 2 OF 4	DATE: 12/02/91	EFFECTIVE ON COACH
SCHEMATIC #PC0210.4	ACAD # BC\50DIM\PCB\PC0210	DISK #344	DRAWN BY: KML	# BC 60375-

PROPRIETARY INFORMATION: THE INFORMATION HEREON IS THE PROPERTY OF COUNTRY COACH, INC. AND OR ITS SUBSIDIARIES. WITHOUT WRITTEN PERMISSION, ANY COPYING, TRANSMITTAL TO OTHERS, AND ANY USE EXCEPT THAT FOR WHICH IT IS LOANED, IS PROHIBITED.