


Modifications to the Fresh Water System

The standard regulator (SureFlo) only allowed approximately 1 gpm at static pressure and the pumps needed to be run, drawing water from the tank, to supplement flow for showers, etc. The new Watts regulator setup allows much better flow for all uses when connected to any fresh water hookup. This regulator is easily disassembled for service.



Hose Connection

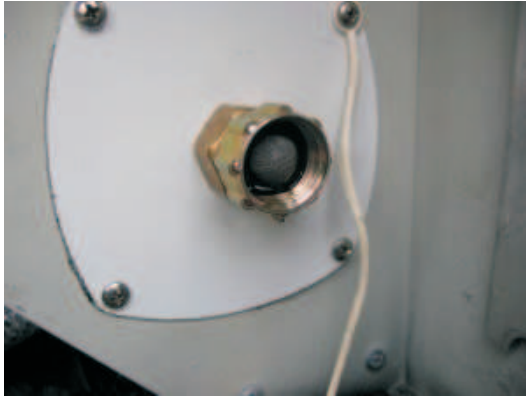

Anti-Backflow Device



Watts N35 3/4" Regulator



Drain / Hose Connection



Regulated to 50 psi



Overall View