


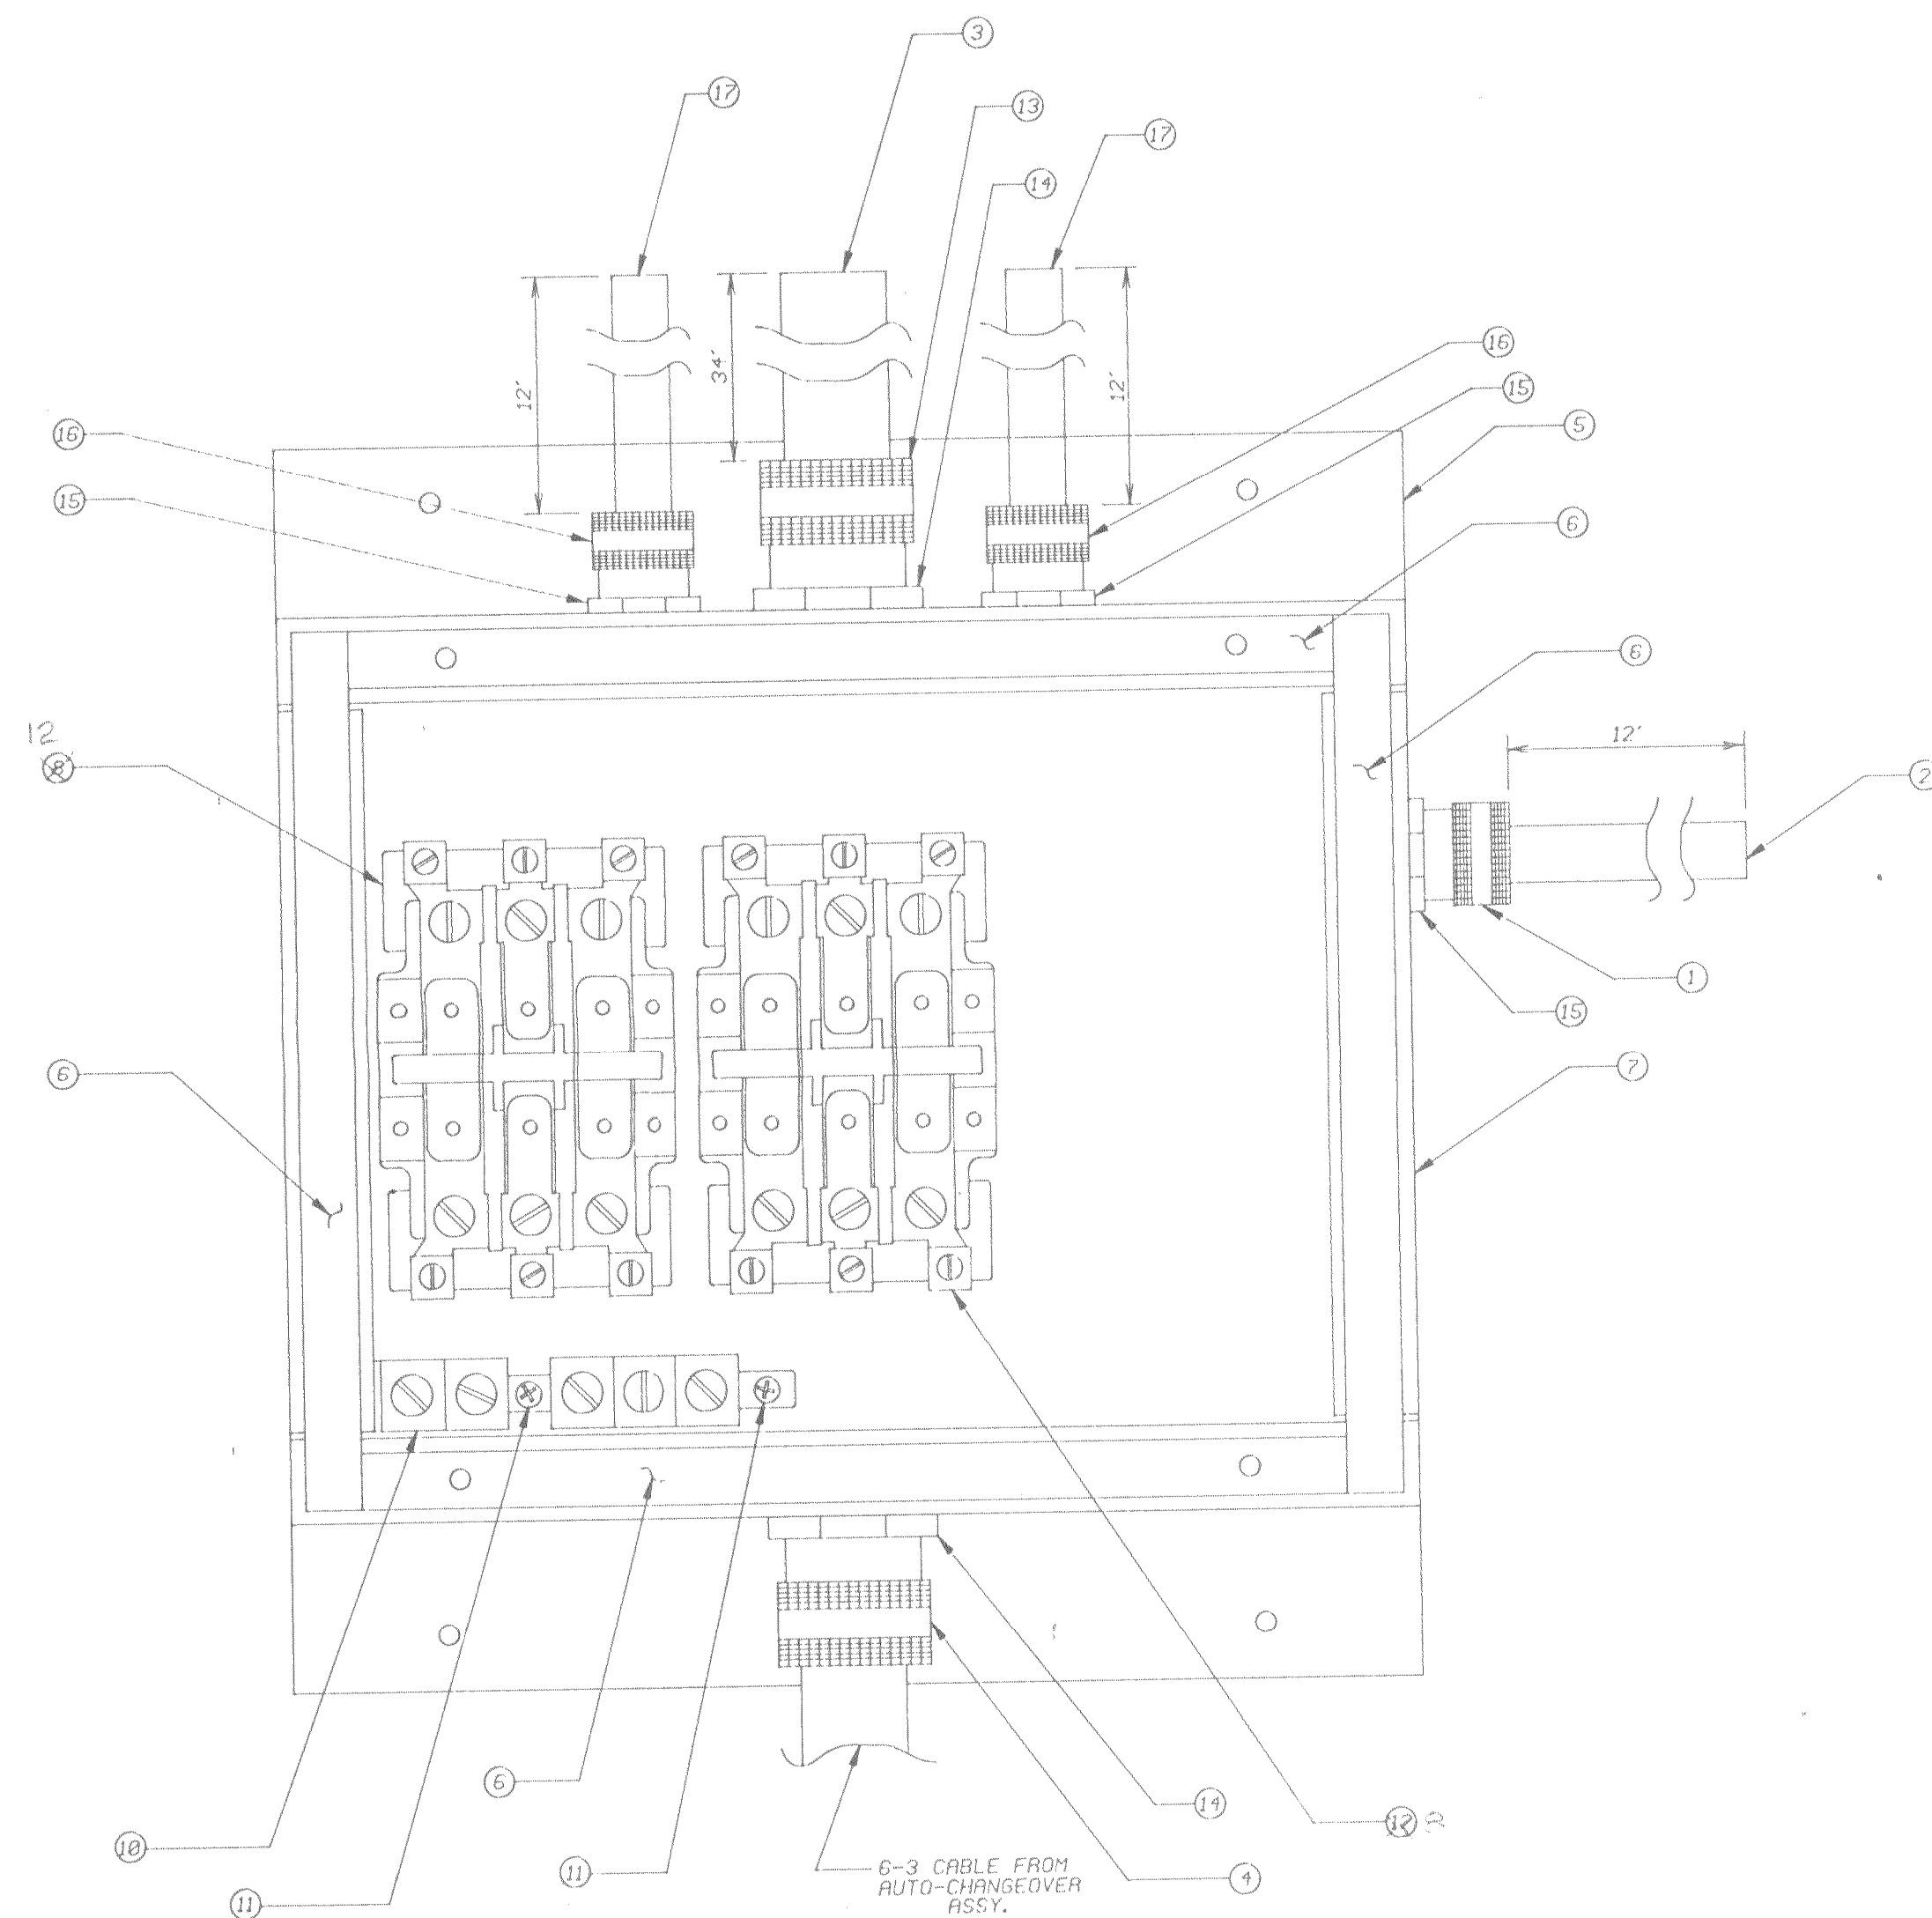

NO.	P/N	DESCRIPTION	QTY
1	3929924	CONNECTOR, CORD GRIP, ELEC., .75 HUB, .38 - .50 CG-3775	1
2	2239903	WIRE, 10-2, WITH GROUND, COPPER TYPE NM	13'
3	3903465	CABLE, 6AWG-4 TYPE W	35'
4	3930104	CONNECTOR, CORD GRIP, ELEC., 1.25 HUB, .75 - .88 CG-75125	1
5	3930005	BRACKET, MTC., BOX, CONTACTOR, SHORELINE SUPPLY, 30A	1
6	2227320	WEATHERSTRIP, SCREEN DOOR	34"
7	3929999	BOX, CONTACTOR, SHORELINE SUPPLY, 30A (WITH COVER)	1
8	3927381	CONTACTOR, FURNAS, 120V, NO. 42CE35AF106	1
9	3788049	RIVET, BLIND, ALUM., 3/16 DIA., W/ALUM M, 251-375	12
10	3927456	BAR, GROUND, WESTINGHOUSE GB6A	1
11	2193456	SCREW, SM, PH, PN/HD, 10-24 X 3/8, TYPE G, ZN3	2
12	3929205	CONTACTOR, FURNAS, 120V, 2P-NO 1P-NC NO 42CE65AF106	1
13	3929932	CONNECTOR, CORD GRIP, ELEC., 1.25 HUB, 1.0 - 1.13 CG-100125	1
14	3930476	LOCKNUT, CONDUIT, RIGID, 1.25 BL125	2
15	3930484	LOCKNUT, CONDUIT, RIGID, 0.75 BL75	3
16	3875440	CONNECTOR, CORD GRIP, ELEC, STGHT, ALUM, .75 HUB, .25-.37	2
17	2266617	WIRE, 18-3, TYPE SO, 600 V, HD BLK NEOPRENE	26'

NOTES:

1. INSTALL ITEMS NO. 8, 10, & 12 PRIOR TO ITEM NO. 5.
2. WIRE PER P/N 3927407 - DIAGRAM, WIRING, SHORELINE SUPPLY 89 SP
3. REMOVE ALL METAL SHAVINGS FROM INTERIOR OF CONTACTOR BOX.
4. SEAL ALL OPEN SEAMS & HOLES WITH SILICONE SEALANT.

MATERIAL:		INACTIVE 2-15 89 PER GEN 1 2816	
FLAT SIZE:			
FINISH	COLOR OR TYPE	LET	REVISIONS
RAW ☐	PAINT ☐	ECN	DR. APP. CK. ECN DATE
PRIME ☐	PLATING ☐	8701A Blue Bird Wanderlodge	
	OTHER ☐	FORT VALLEY, GEORGIA, U.S.A.	
TOLERANCES ON ALL DIMENSIONS IS PLUS		CONTACTOR BOX ASSY., SHORELINE SUPPLY, 30A	
OR MINUS UNLESS OTHERWISE SPECIFIED.		WLSP	
INACTIVATES NOS		DR. 1-18-89 BY J. MEYER	SIZE
REPLACED BY NO	2739089	APP. BY	C
		CK. BY	INACTIVE 3930450